



UNIVERSAL CAMERA BRACKET SOLUTION

SHUFFLE is a connected, modular approach to city hardware - with its plug-and-play rotatable modules that contain pre-certified hardware, it can be configured to suit your specific needs.

KEY ADVANTAGES

- > **Robust design with high-quality finish**
- > **Easy installation with patented mounting system**
- > **Compatible with a wide range of PTZ cameras**



The SHUFFLE Camera Brackets are accessories that offer the possibility of integrating high-performing PTZ cameras into SHUFFLE columns. Created to complement the design of the SHUFFLE and enhance camera stability and safety, these versatile accessories can incorporate the majority of PTZ cameras available on the market.

These accessories were carefully designed to seamlessly integrate the SHUFFLE column with minimal disruption to the aesthetics and overall product design.

These accessories are built with the same high-grade materials — high-pressure, die-cast aluminium and gravity casting aluminium — with fasteners in stainless steel to ensure the same superior durability of the SHUFFLE.

They are then coated in a polyester powder paint that comes in a variety of colours to match the column identically and ensure a high-quality finish.




UNIVERSAL CAMERA BRACKET | CHARACTERISTICS

KEY FEATURES



- > **Compatible with most PTZ cameras in the market**
- > **Excellent stability for minimal camera movement**
- > **Concealed cable management**

DIMENSIONS AND MOUNTING

With clamps AxBxC (mm inch)	490x216x196 19.3x8.5x7.7
With cover AxBxC (mm inch)	490x213x196 19.3x8.4x7.7
Weight (kg lbs)	7.7 17
Aerodynamic resistance (CxS)	apox. 0.5
Mounting possibilities	Clamps

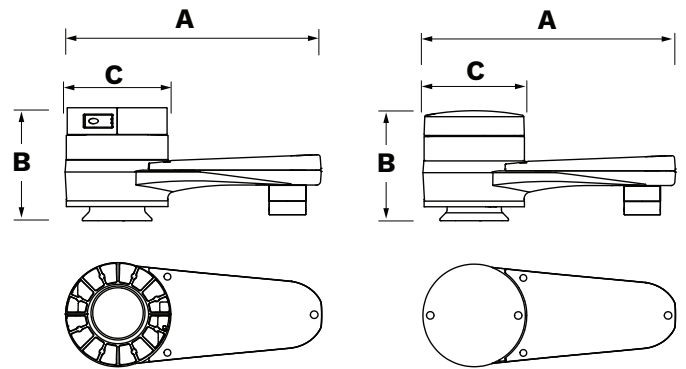

CAMERA INTERFACES

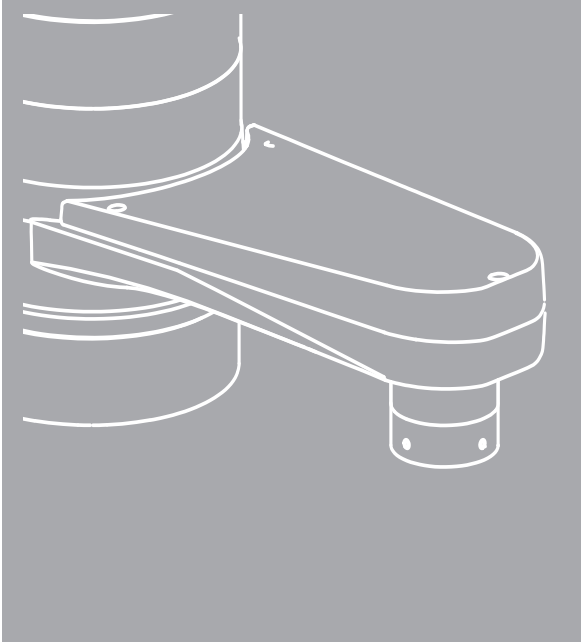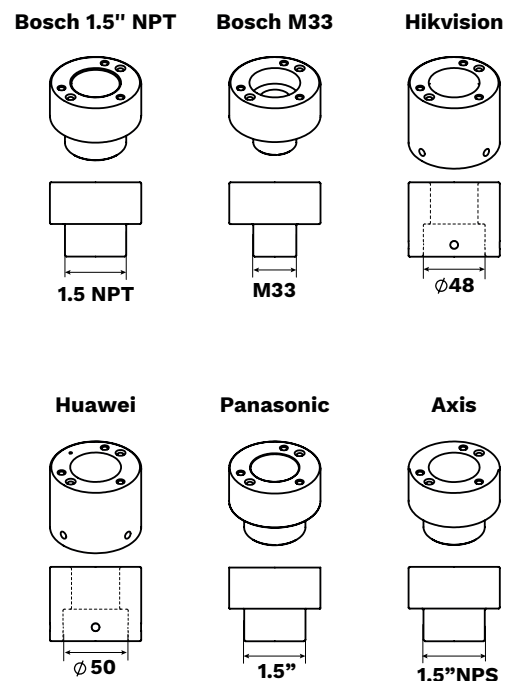

UNIVERSAL CAMERA BRACKET | CHARACTERISTICS

GENERAL

Recommended installation height	2.3m to 6.8m 7.5' to 22.3'
CE mark	Yes
ROHS compliant	Yes

HOUSING AND FINISH

Housing	Aluminum
Housing finish	Polyester powder coating
Camera interface	Aluminium
Standard colour	AKZO grey 900 sanded
Tightness level	IP 66
Impact resistance	IK 08

ELECTRICAL

Electrical class	Class I EU, Class II EU
Power Consumption	will depend on camera model installed

SHUFFLE

SHUFFLE Pole model	2 doors same side 3 doors
	Mains box Beyond light power supply box
SHUFFLE Components	POE tray - POE inside pole Support plate network - POE outside pole Network cable
Position on pole	Any position
Bracket quantity	Maximum 4 brackets on one pole

INTERFACE AVAILABLE FOR CAMERA MODELS

Axis	AXIS Q37 AXIS P56 PTZ AXIS Q61 PTZ AXIS Q60 PTZ
Bosch	Series 5000 7000 - 1.5" NPT or M33
Hikvision	Pro Series Ultra Series <i>(Please consult us to check the model compatibility)</i>
Huawei	IPC66 X67 M67
Panasonic	WV-X65